

Sub-50 Femtosecond, Multiterawatt Ti:Sapphire Laser System

**P. S. Banks, J. Zweiback, S. N. Fochs,
B. C. Stuart, and M. D. Perry**

**This paper was prepared for submittal to the
Conference on Lasers and Electro-Optics '96
Anaheim, California
June 2-7, 1996**

March 12, 1996



This is a preprint of a paper intended for publication in a journal or proceedings. Since changes may be made before publication, this preprint is made available with the understanding that it will not be cited or reproduced without the permission of the author.

DISCLAIMER

This document was prepared as an account of work sponsored by an agency of the United States Government. Neither the United States Government nor the University of California nor any of their employees, makes any warranty, express or implied, or assumes any legal liability or responsibility for the accuracy, completeness, or usefulness of any information, apparatus, product, or process disclosed, or represents that its use would not infringe privately owned rights. Reference herein to any specific commercial product, process, or service by trade name, trademark, manufacturer, or otherwise, does not necessarily constitute or imply its endorsement, recommendation, or favoring by the United States Government or the University of California. The views and opinions of authors expressed herein do not necessarily state or reflect those of the United States Government or the University of California, and shall not be used for advertising or product endorsement purposes.

Sub-50 femtosecond, multiterawatt Ti:sapphire laser system

P. S. Banks, J. Zweiback, S. N. Fochs, B. C. Stuart, M. D. Perry

Lawrence Livermore National Laboratory,

P.O. Box 808, Livermore, California 94550

(510) 423-9918

We discuss a Ti:sapphire laser system based on chirped pulse amplification which produces over 750 mJ in sub-50 femtosecond pulses. We also describe a novel, all-reflective stretcher with a stretching ratio of 30,000.

This work was performed under the auspices of the U.S. Department of Energy by Lawrence Livermore National Laboratory under contract No. W-7405-Eng-48.

Sub-50 femtosecond, multiterawatt Ti:sapphire laser system

P. S. Banks, J. Zweiback, S. N. Fochs, B. C. Stuart, M. D. Perry

Lawrence Livermore National Laboratory,

P.O. Box 808, Livermore, California 94550

Recent advances in ultrashort (<100 fs) pulse lasers have made it possible to explore ultrahigh field physics using relatively compact laser systems. We report on the design and construction of a compact Nd:YLF/Ti:sapphire-based CPA system capable of producing over 750 mJ in pulses shorter than 50 fs at 1 Hz.

This system is composed of Kerr lens modelocked Ti:sapphire oscillator which produces sub-20 fs pulses centered at 820 nm in a 90 Mhz pulse train. As Perry et al.¹ have shown for systems based on chirped pulse amplification, high contrast in the temporal pulse shape after compression is limited by the B-integral accumulated in the system. To minimize this, a new, all-reflective stretcher design is used to stretch the pulse to 600 ps as shown in Figs. 1 and 2. Fig. 1 shows an interferometric autocorrelation trace of the oscillator output, corresponding to a pulse length of 22 fs FWHM. Using a fast avalanche photodiode with a sampling head, the stretched pulse length was measured at 600 ps FWHM as shown in Fig. 2. Finally, in addition to giving a stretching ratio of 30,000, the stretcher is aberration-free, is composed of only 4 elements, and has a bandpass of approximately 60 nm (as shown in Fig. 3).

Individual stretched pulses are injected at a 10 Hz repetition rate into a power amplifier chain comprised of 4 laser-pumped, Ti:sapphire stages. The first two of these are pumped at 10 Hz by the second harmonic output of a commercial Q-switched Nd:YAG laser. The third and fourth stages are pumped at 10 Hz and 1 Hz, respectively, by the doubled output of a Nd:YLF-based,

P.S. Banks, J. Zweiback, S.N. Fochs, B.C. Stuart, M.D. Perry. “Sub-50 fs multiterawatt...”

flashlamp-pumped, MOPA chain. This chain is seeded by a single longitudinal mode ring oscillator which produces 8 mJ in 15 ns pulses at 1053 nm and has smooth spatial and temporal profiles.

The choice of Nd:YLF lasing at 1053 nm for this pump chain allows the option of adding large, Nd-phosphate glass amplifier heads to pump a fifth stage in the future.

The Ti:sapphire chain is composed of a regenerative amplifier which amplifies to 3 mJ followed by a series of three multi-pass amplifiers. The third amplifier stage produces pulse energies of 200 mJ which can be switched out directly to the compressor and compressed to under 50 fs—i.e. over 2 TW of peak power at 10 Hz. Finally, the fourth stage produces 750 mJ at 1 Hz compressed to less than 50 fs, providing a second beamline for higher power experiments with a peak power in excess of 15 TW.

¹ M. D. Perry, T. Ditmire, B. C. Stuart, Opt. Lett. **19**, 2149 (1994).

Captions:

Fig. 1: Interferometric autocorrelation trace of 22 fs pulses from Ti:sapphire oscillator.

Fig. 2: Sampled temporal profile of pulse after stretcher.

Fig. 3: Spectrum both before (solid line) and after (dashed line) stretcher.

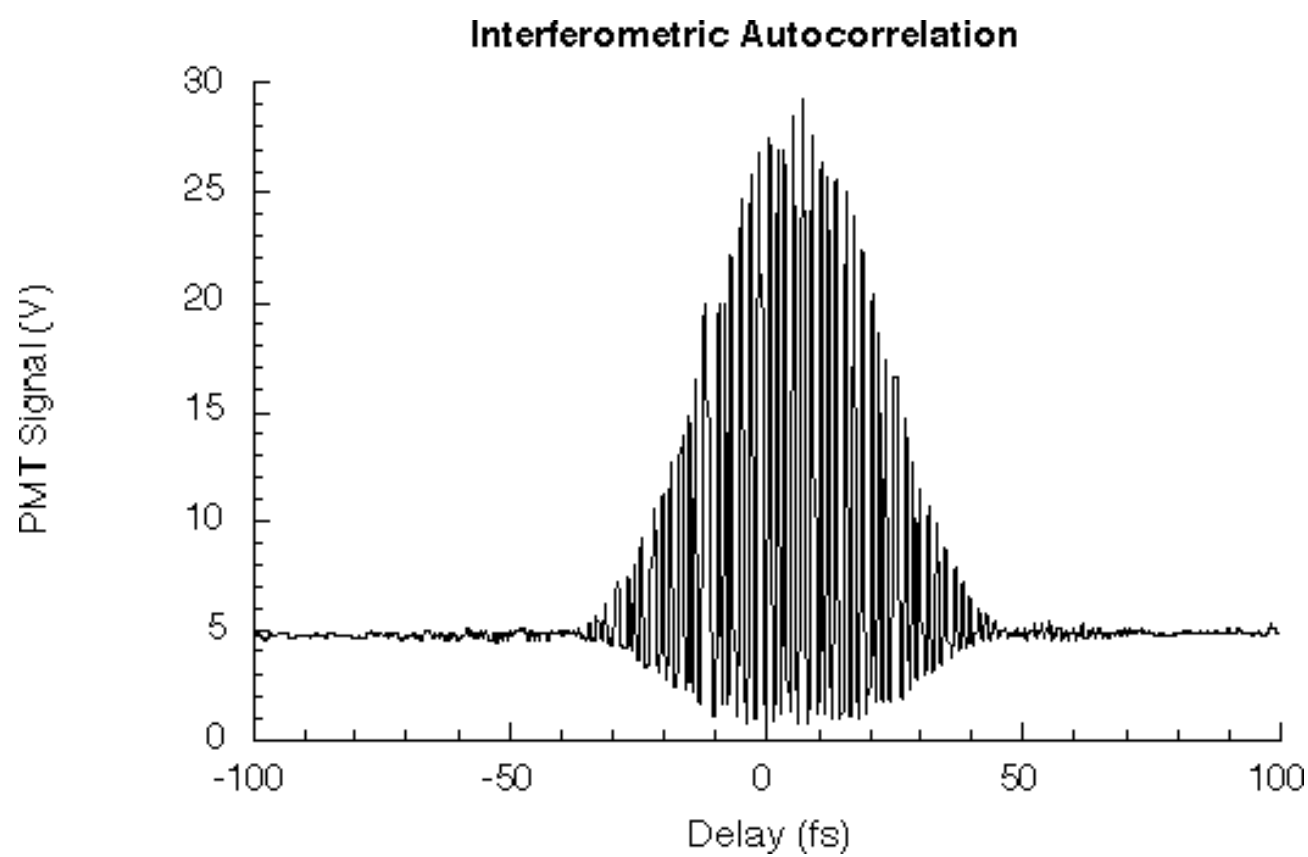


Figure 1

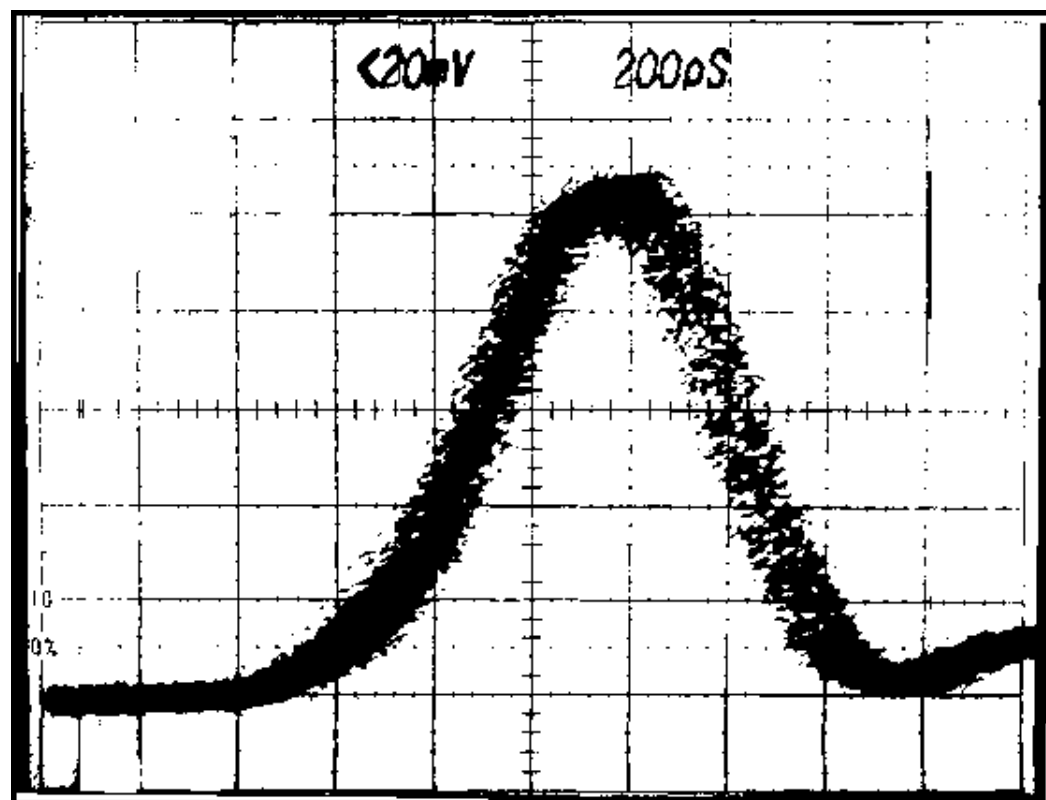


Figure 2

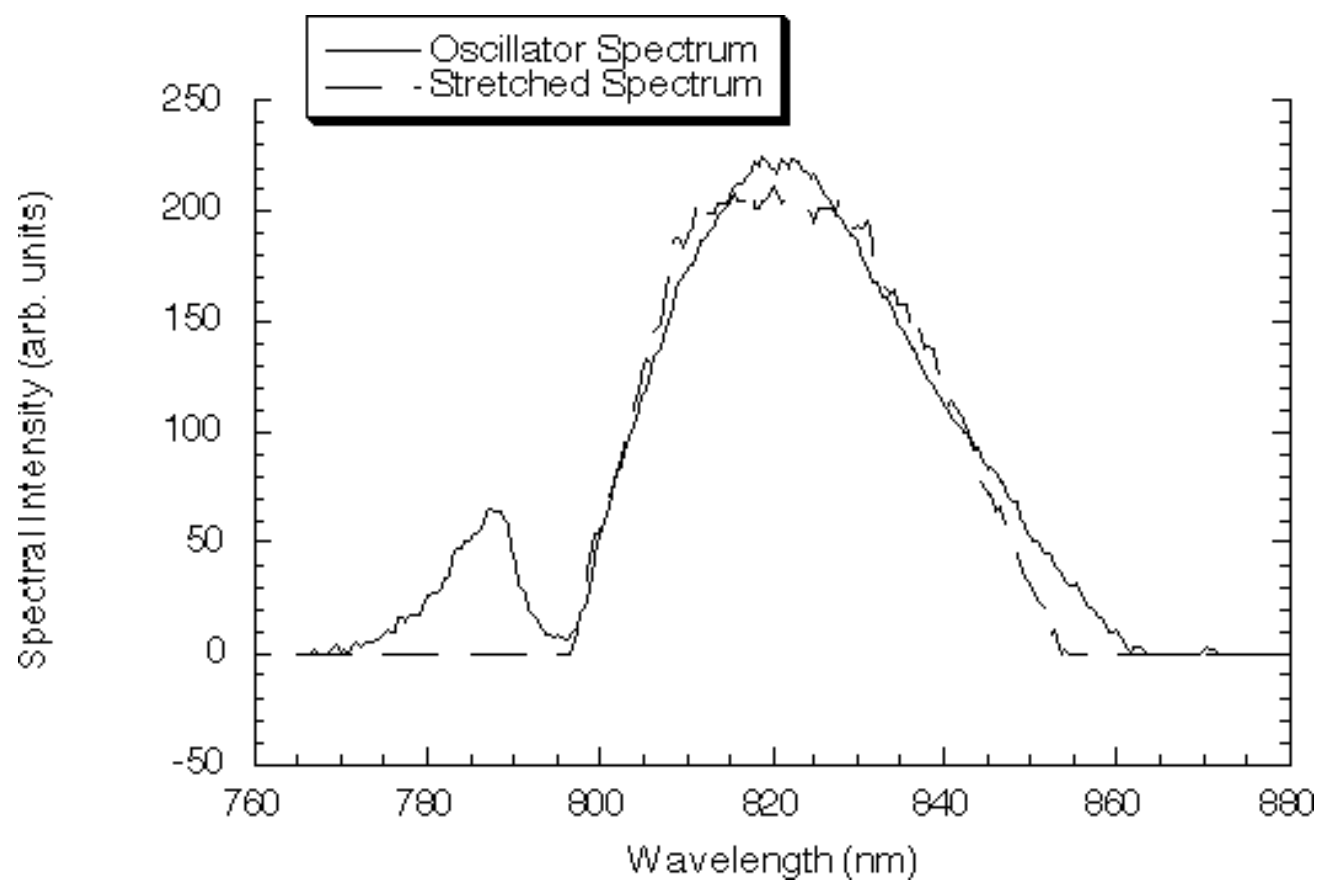


Figure 3